



9400 Profile

9400 (LM22950-30)

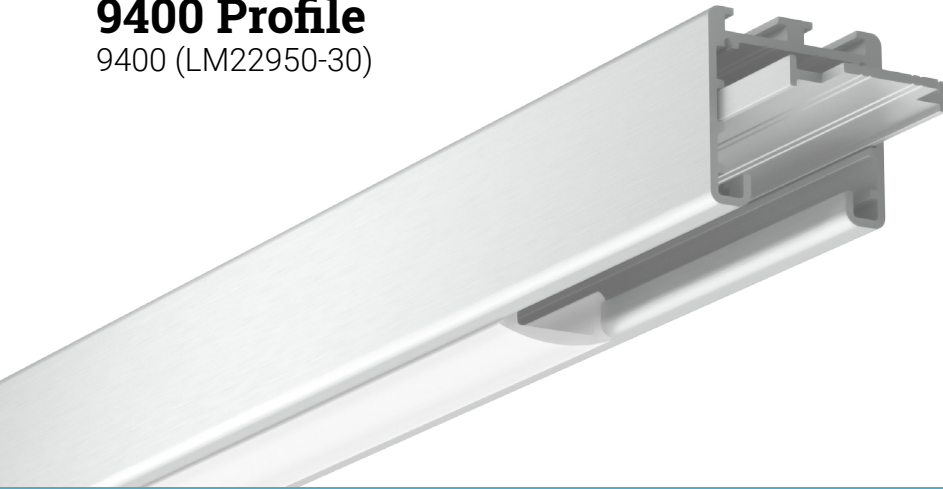

9000 Series

Cross-section dimensions:



The **9400 profile** has all the bells and whistles of the 9200, but its twin mounting channels are a step up, for a **wide range of installation options**. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using **corner joiners**. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.

Features

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heatsink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED strips.
- Designed to give a uniform light without hot spots when using an opal lens and a strip of 72 LEDs per meter or more.
- Its mounting channels make it compatible with a wide range of installation accessories.

Options



LED strip compatibility

Compatible with LED strips and PCBs up to **33mm** wide.

Linear weight



























0.697 lbs/ft, 1.038 kg/m (without lens or insert)















9400 Profile

Components and accessories

9000 Series

PROFILE	LENSES	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH
 <p>9400 Profile Alu 9400 (LM22950-30)</p>	 <p>9000 Clear 9547 (LM22960-7)</p>	 <p>9200-9400 endcap 9270 (LM22970-11) ALU 9272 (LM22970-15) BLACK 9274 (LM22970-20) WHITE</p>	 <p>9000 clip-in bracket 9571 (LM22980-1)</p>  <p>9400 surf. 2-side bracket 9486 (LM22980-41) ALU 9443 (LM22980-43) WHITE 9487 (LM22980-45) BLACK</p>  <p>9400 surf. 1-side bracket 9421 (LM22326-21) ALU 9422 (LM22326-22) WHITE 9423 (LM22326-23) BLACK</p>  <p>9400 surf. 90-deg. bracket 9431 (LM22326-31) ALU 9432 (LM22326-32) WHITE 9433 (LM22326-33) BLACK</p>  <p>Swivel wall bracket 9492 (LM22980-61) ALU 9493 (LM22980-15) BLACK 9494 (LM22980-16) WHITE</p>  <p>Swivel sign arm, 6" offset 9491 (LM22980-55) ALU 9496 (LM22980-56) BLACK 9498 (LM22980-57) WHITE</p>  <p>Swivel sign arm, 18" offset 9490 (LM22980-51) ALU 9495 (LM22980-52) BLACK 9497 (LM22980-53) WHITE</p>  <p>Type B dbl. chann. susp. kit with 15ft. aircraft cable 9480 (LM22320-90) ALU 9481 (LM22320-91) BLACK 9482 (LM22320-92) WHITE</p>	 <p>Rail Insert 1.4 in. (37mm) 9000 (LM22954-99)</p>  <p>Type B straight joiner 1325 (LM22335-01)</p>  <p>Type B horz. 45°/135° joiner 1328 (LM22335-07)</p>  <p>Type B horz. 90° joiner 1326 (LM22335-03)</p>  <p>Type B vert. 90° joiner 1327 (LM22335-05)</p>  <p>Type B vert. 45°/135° joiner 1330 (LM22335-06)</p>  <p>Type B wire cover 8099 (LM22335-99)</p>  <p>1.5" stainless steel canopy kit for coax. wire (suspended) 4075 (LM22980-30)</p>  <p>5" canopy kit, fits standard 4" junction box 9484 (LM22980-21) ALU 9483 (LM22980-19) WHITE 9485 (LM22980-23) BLACK 9488 (LM22980-24) CHROME</p>  <p>7950 10" Canopy Kit 7950 (LM22840-50) ALU 7961 (LM22840-61) WHITE 7962 (LM22840-62) BLACK 7963 (LM22840-63) CHROME 7964 (LM22840-64) BRUSHED NICKEL</p>	<p>Custom length by sections of 6 to 240 inches (6m).</p>
 <p>9400 Profile Black 9410 (LM22950-35)</p>	 <p>9000 Optiflex 9541 (LM22960-1)</p>				
 <p>9400 Profile White 9411 (LM22950-31)</p>	 <p>9000 Opal 9543 (LM22960-3)</p>				
	 <p>9000 Focus 9545 (LM22960-5)</p>				
PROFILE	LENS	ENDCAPS	BRACKETS	ACCESSORIES	LENGTH

Lumen package

LUMEN PACKAGE*	COLOR TEMPERATURE	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	NOTES
 <p>255 lm/ft. flex. 5/16" wide 12/24V Constant Voltage LP3528120</p>  <p>308 lm/ft. flex. 5/16" wide 24V Constant Voltage LP3528180</p>  <p>462 lm/ft. flex. 9/16" wide 24V Constant Voltage LP3528240</p>  <p>650 lm/ft. rigid 1/2" wide, 350/700mA Constant Current LP573052**</p>	 <p>Candle White 2400K</p>  <p>Soft White 2700K</p>  <p>Warm White 3000K</p>  <p>Bright White 3500K</p>  <p>Neutral White 4200K</p>	<p>Please specify the needed DC wire length (include units).</p>	<p>IP22 Indoor, dry (IP22) IP22</p> <p>IP68 Indoor, wet (IP68) IP68</p> <p>IP68+ Outdoor, weatherproof (IP68, NMWU, UV-resistant) IP68+</p>	<p> Non-dimmable NO</p> <p> ELV dimming ELV</p> <p> 0-10V dimming 0-10V</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and transluency conversion factors.</p> <p>** Only available in CCTs of 3000K and 4200K, IP22, and lengths of 1/2/3/4/5/6/8 feet.</p>
LUMEN PACKAGE	COLOR TEMPERATURE (CCT)	LEAD LENGTH	USAGE	POWER SUPPLY TYPE	

Notes

