

LETO 11 Mini P

PENDANT LED DOWNLIGHT



LETO 11 Mini - Pendant LED Light. Leto 11 Mini is a slimmed down version of the Leto 11. This small, medium and tall pendant is slim and offers sleek minimalism to sitting and work areas with an efficient and powerful LED module.

Ordering Code

Fixture	691								
	1	2	3	4	5	6	7	8	9
Driver							--	--	
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **691 - S - A90 - 617 - 27 - 07 - 00 - 08 - 02** | Driver **954 - 08 - 05 - 00 - STD - 120 - A90 - 07**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory**		
691 · Leto 11 Mini Pendant	S · Small (73mm)* M · Medium (209mm) L · Large (346mm)	A90 · Accuracy	617 · 17° 624 · 24° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6W) 10 · 1000 (9W) 15 · 1500 (14W)	00 · No Accessory DL · Diffusing Lens HO · Honeycomb		
8 - Body Color	9 - Baffle Color	1 - Canopy Style		2 - Canopy Color		3 - Suspension Type		
<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	955 · Round Slim 955F · Round Flangeless** 954 · Round Semi-Recessed	<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	00 · Feed Cable (6' incl.) 03 · Solid Stem (6' MAX) 05 · 2 Powered Aircraft** (6' incl.) <i>Contact SENSO for custom lengths</i>	
4 - Suspension Color	5 - Driver	Dim Level		Dim Level		6 - Voltage	7 - CRI/LED	8 - Lumen
00 · None** 01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase** ELDOLC · EldoLED 0 - 10 Volt** DALI · Dali Protocol**	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital** LUT2W · 2 Wire for phase**/5 LUT5S · 5 Series Eco System** CSMB · Casambi Wireless Control**	1% 1% 5% 6%	120 · 120V 277 · 277V	Same as Fixture	Same as Fixture	

*1 accessories not available with small size

**2 small size always remote mount driver

3 no feed cable color option for **05 - 2 Powered Aircraft

**4 120V only

**5 remote mount

**6 second driver required

LETO 11 Mini P

PENDANT LED DOWNLIGHT

Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety


Installation

- Height adjustable feed cable, powered aircraft cable or solid stem included
- Pre-assembled for quick installation

Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions

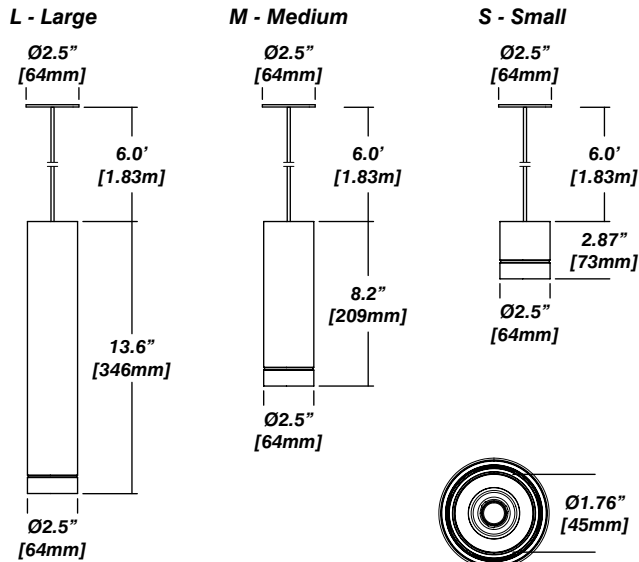


Canopy



955 - Round Slim

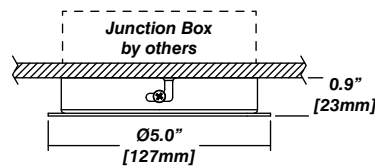

955F - Round Flangeless

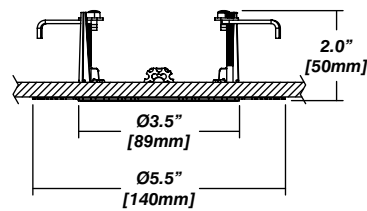

954 - Semi-Recessed + Cylinder Driver Housing

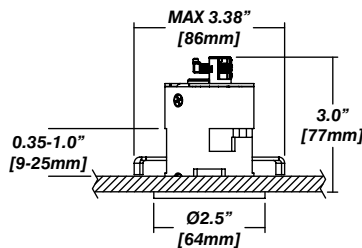


Accessories

Frosted Lens



Honeycomb




LETO 11 Mini P

PENDANT LED DOWNLIGHT



Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions





910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



954 Driver Layouts

954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing

+ 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

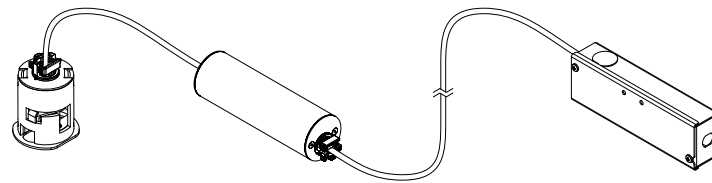

954 with Cylinder Driver Housing

+ 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

